



**TEST REPORT**

<b>Applicant:</b>	Flashbay Electronics	<b>Manufacturer:</b>	Flashbay Electronics
	1-4/F of Bldg No.3, Bldg No.2, 101-501F of Bldg No.1, Xifengcheng Industrial Park, No.2, Fuyuan Road, Heping Community, Fuhai Street, Baoan District, Shenzhen City, Guangdong Province, P.R. China		1-4/F of Bldg No.3, Bldg No.2, 101-501F of Bldg No.1, Xifengcheng Industrial Park, No.2, Fuyuan Road, Heping Community, Fuhai Street, Baoan District, Shenzhen City, Guangdong Province, P.R. China

**Sample Description:**

Product Name : Bluetooth Speakers

Brand Name : N/A

Model No. : Tab-Y450, Ray-Y450, Seed-Y450, Cube-Y450, Aqua-Y450

Electrical Rating : 5Vdc 200mA, Class III apparatus

Mass of equipment : 0.065-0.110 kg

Date Received : November 28, 2018

Date Test Conducted : November 28, 2018 – July 09, 2019

Report Issue Date : July 09, 2019

Standard(s) : IEC 62368-1:2014 + Japan deviation

Conclusion : PASS

\*\*\*\*\*End of Page\*\*\*\*\*

**Prepared by:**

**Approved by:**

**Yam Wang  
Engineer**

**Storm Xiong  
Senior Project Engineer**

*This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.*



## **TEST REPORT**

### **General Remark:**

1. When determining of test conclusion, measurement uncertainty of tests have been considered.
2. Instruction sheets and other texts (such as markings, etc) required by the standard should be the official language(s) of the country in which the appliance is to be sold.
3. All the models covered in this report were identical except for model name and the appearance (only for color, silk-screen, enclosure shape and enclosure material).
4. The equipment under test (EUT) has been evaluated at maximum ambient (Tma) of +40°C according to the manufacturer's declaration.
5. The equipment is a Bluetooth Speakers supplied by external DC source, whose output comply with PS1.

\*\*\*\*\*End of Page\*\*\*\*\*



## TEST REPORT

### Revision History:

-NIL

\*\*\*\*\*End of Page\*\*\*\*\*



**TEST REPORT**

**FCC ID: 2ALRV-RTJS1701**  
**IC: 22713-RTJS1701**  
 Made in China by Flashbay  
 Model: Aqua-Y450  
 Waterproof rating: IPX7  
 Capacity: 450mAh  
 Input: 5V==200mA

**FCC ID: 2ALRV-CU1701**  
**IC: 22713-CU1701**  
 450 mAh Lithium-ion polymer  
 5V==200mA  
 Model: Cube-Y450  
 Made in China by Flashbay

**FCC ID: 2ALRV-CU1701**  
**IC: 22713-CU1701**  
 450 mAh Lithium-ion polymer  
 5V==200mA  
 Model: Ray-Y450  
 Made in China by Flashbay

**FCC ID: 2ALRV-CU1701**  
**IC: 22713-CU1701**  
 450 mAh Lithium-ion polymer  
 5V==200mA  
 Model: Seed-Y450  
 Made in China by Flashbay

**FCC ID: 2ALRV-CU1701**  
**IC: 22713-CU1701**  
 450 mAh Lithium-ion polymer  
 5V==200mA  
 Model: Tab-Y450  
 Made in China by Flashbay

Remark:

- The manufacturer has the responsibility to put manufacturer name / trade mark and their address, batch number on the equipment. And the importer also has the responsibility to put their name / trade mark and address on the equipment before place the equipment on the market.
- WEEE logo shall be at least 7 mm in height, CE mark shall be at least 5 mm in height.

\*\*\*\*\*End of Page\*\*\*\*\*



## TEST REPORT

**Energy source identification and classification table:**

<p>(Note 1: Identify the following six (6) energy source forms based on the origin of the energy.)                  (Note 2: The identified classification e.g., ES2, TS1, should be with respect to its ability to cause pain or injury on the body or its ability to ignite a combustible material. Any energy source can be declared Class 3 as a worse case classification e.g. PS3, ES3.)</p>	
<p><b>Electrically-caused injury (Clause 5):</b>                  (Note: Identify type of source, list sub-assembly or circuit designation and corresponding energy source classification)                  Example: +5 V dc input <span style="float: right;">ES1</span></p>	
<b>Source of electrical energy</b>	<b>Corresponding classification (ES)</b>
5Vdc input	ES1
<p><b>Electrically-caused fire (Clause 6):</b>                  (Note: List sub-assembly or circuit designation and corresponding energy source classification)                  Example: Battery pack (maximum 85 watts): <span style="float: right;">PS2</span></p>	
<b>Source of power or PIS</b>	<b>Corresponding classification (PS)</b>
Li-ion battery (maximum power: <100W)	PS2
<p><b>Injury caused by hazardous substances (Clause 7)</b>                  (Note: Specify hazardous chemicals, whether produces ozone or other chemical construction not addressed as part of the component evaluation.)                  Example: Liquid in filled component <span style="float: right;">Glycol</span></p>	
<b>Source of hazardous substances</b>	<b>Corresponding chemical</b>
Battery (in the EUT)	Electrolyte
<p><b>Mechanically-caused injury (Clause 8)</b>                  (Note: List moving part(s), fan, special installations, etc. &amp; corresponding MS classification based on Table 35.)                  Example: Wall mount unit <span style="float: right;">MS2</span></p>	
<b>Source of kinetic/mechanical energy</b>	<b>Corresponding classification (MS)</b>
Shape edges and corner of product	MS1
Equipment mass- Approximate 0.01kg<7Kg.	MS1
<p><b>Thermal burn injury (Clause 9)</b>                  (Note: Identify the surface or support, and corresponding energy source classification based on type of part, location, operating temperature and contact time in Table 38.)                  Example: Hand-held scanner – thermoplastic enclosure <span style="float: right;">TS1</span></p>	
<b>Source of thermal energy</b>	<b>Corresponding classification (TS)</b>
Enclosure surface	TS1
<p><b>Radiation (Clause 10)</b>                  (Note: List the types of radiation present in the product and the corresponding energy source classification.)                  Example: DVD – Class 1 Laser Product <span style="float: right;">RS1</span></p>	
<b>Type of radiation</b>	<b>Corresponding classification (RS)</b>
LED used for indicating light	RS1

\*\*\*\*\* End of Page \*\*\*\*\*



## TEST REPORT

**Overview of employed safeguards:**

Clause	Possible Hazard			
5.1	Electrically-caused injury			
Body Part (e.g. Ordinary)	Energy Source (ES3: Primary Filter circuit)	Safeguards		
		Basic	Supplementary	Reinforced (Enclosure)
Ordinary	ES1: secondary parts	N/A	N/A	N/A
6.1	Electrically-caused fire			
Material part (e.g. mouse enclosure)	Energy Source (PS2: 100 Watt circuit)	Safeguards		
		Basic	Supplementary	Reinforced
All combustible materials around all circuit within equipment	PS2: Lithium battery (maximum power: <100W)	No ignition and attainable high temperatu re value	Control fire spread, V-1 or better fire enclosure provided	N/A
7.1	Injury caused by hazardous substances			
Body Part (e.g., skilled)	Energy Source (hazardous material)	Safeguards		
		Basic	Supplementary	Reinforced
Ordinary	Chemical electrolyte	N/A	The metallic enclosure of battery used as container	N/A
8.1	Mechanically-caused injury			
Body Part (e.g. Ordinary)	Energy Source (MS3:High Pressure Lamp)	Safeguards		
		Basic	Supplementary	Reinforced (Enclosure)
Ordinary	MS1	N/A	N/A	N/A
9.1	Thermal Burn			
Body Part (e.g., Ordinary)	Energy Source (TS2)	Safeguards		
		Basic	Supplementary	Reinforced
Ordinary	TS1: Accessible surface	N/A	N/A	N/A

\*\*\*\*\*End of Page\*\*\*\*\*



## TEST REPORT

**Overview of employed safeguards:**

10.1	Radiation			
Body Part (e.g., Ordinary)	Energy Source (Output from audio port)	Safeguards		
		Basic	Supplementary	Reinforced
Ordinary	RS1	N/A	N/A	N/A
Supplementary Information:				
(1) See attached energy source diagram for additional details.				
(2) "N" – Normal Condition; "A" – Abnormal Condition; "S" Single Fault				

\*\*\*\*\*End of Page\*\*\*\*\*



**TEST REPORT**

**Test Results:**

<u>Clause</u>	<u>Title/Description</u>	<u>Result</u>
4	GENERAL REQUIREMENTS	P
5	ELECTRICALLY-CAUSED INJURY	P
6	ELECTRICALLY- CAUSED FIRE	P
7	INJURY CAUSED BY HAZARDOUS SUBSTANCES	P
8	MECHANICALLY-CAUSED INJURY	P
9	THERMAL BURN INJURY	P
10	RADIATION	P
ANNEX B	NORMAL OPERATING CONDITION TESTS, ABNORMAL OPERATING CONDITION TESTS AND SINGLE FAULT CONDITION TESTS	P
ANNEX C	UV RADIATION	N/A
ANNEX D	TEST GENERATORS	N/A
ANNEX E	TEST CONDITIONS FOR EQUIPMENT CONTAINING AUDIO AMPLIFIERS	P
ANNEX F	EQUIPMENT MARKINGS, INSTRUCTIONS, AND INSTRUCTIONAL SAFEGUARDS	P
ANNEX G	COMPONENTS	N/A
ANNEX H	CRITERIA FOR TELEPHONE RINGING SIGNALS	N/A
ANNEX J	INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION	N/A
ANNEX K	SAFETY INTERLOCKS	N/A
ANNEX L	DISCONNECT DEVICES	N/A

\*\*\*\*\*End of Page\*\*\*\*\*





**TEST REPORT**

**Test Results:**

<u>Clause</u>	<u>Title/Description</u>	<u>Result</u>
ANNEX M	EQUIPMENT CONTAINING BATTERIES AND THEIR PROTECTION CIRCUITS	P
ANNEX N	ELECTROCHEMICAL POTENTIALS	N/A
ANNEX O	MEASUREMENT OF CREEPAGE DISTANCES AND CLEARANCES	N/A
ANNEX P	SAFEGUARDS AGAINST ENTRY OF FOREIGN OBJECTS AND SPILLAGE OF INTERNAL LIQUIDS	N/A
ANNEX Q	CIRCUITS INTENDED FOR INTERCONNECTION WITH BUILDING WIRING	N/A
ANNEX R	LIMITED SHORT CIRCUIT TEST	N/A
ANNEX S	TESTS FOR RESISTANCE TO HEAT AND FIRE	N/A
ANNEX T	MECHANICAL STRENGTH TESTS	P
ANNEX U	MECHANICAL STRENGTH OF CATHODE RAY TUBES (CRT) AND PROTECTION AGAINST THE EFFECTS OF IMPLOSION	N/A
ANNEX V	DETERMINATION OF ACCESSIBLE PARTS (FINGERS, PROBES AND WEDGES)	P
Annex ZA	NORMATIVE REFERENCES TO INTERNATIONAL PUBLICATIONS WITH THEIR CORRESPONDING EUROPEAN PUBLICATIONS	P
Annex ZB	SPECIAL NATIONAL CONDITIONS	N/A
Annex ZC	A-DEVIATIONS A-deviations	N/A
Annex ZD	IEC AND CENELEC CODE DESIGNATIONS FOR FLEXIBLE CORDS	N/A
	JAPANESE NATIONAL DIFFERENCES	P

Note: P=PASS, N/A=NOT APPLICABLE, N/D=NOT DEMANDED, F=FAIL.

\*\*\*\*\*End of Page\*\*\*\*\*



**TEST REPORT**

**Critical Component List:**

Object/part No.	Manufacturer/trademark	Type/model	Technical data	Standard	Mark(s) of conformity
Plastic enclosure	LG Chem Huizhou Petrochemical CO Ltd	AF312C	V-0, 70 °C  Required thickness: 2.5 mm.min  Measured thickness: 2.5 mm. min	UL94	UL
Wooden enclosure	Interchangeable	--	Measured thickness: 3 mm.min	IEC/EN 62368-1	Test in appliance
Metal enclosure	Interchangeable	--	Measured thickness: 0.8 mm. min	IEC/EN 62368-1	Test in appliance
PCB	SHENZHEN XIANGYU PRINTED CIRCUIT CO LTD	XY-1	V-0, 125°C	UL796	UL
Or	Interchangeable	--	V-1, 125°C.min	UL796	UL
Speaker (one)	Interchangeable	--	For each 4ohm 3W	IEC/EN 62368-1	Test in appliance
Lithium battery	Flashbay Electronics	403040	3.7Vdc, 450mAh  Max. charging current: 450mA;  Max. charging voltage: 4.25V  Max. charging temperature: 45°C  Max. discharging current: 450mA	IEC/EN 62133	Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch. Test Report No. BAT181128N043

- 1) An asterisk indicates a mark which assures the agreed level of surveillance.
- 2) Interchangeability based on specified rating.

\*\*\*\*\*End of Page\*\*\*\*\*



# TEST REPORT

## Product Photos (Representative):



External view-1 for model Aqua-Y450



External view-2 for model Aqua-Y450

\*\*\*\*\*End of Page\*\*\*\*\*



## TEST REPORT

### Product Photos (Representative):



External view-3 for model Aqua-Y450



External view-1 for model Cube-Y450


\*\*\*\*\*End of Page\*\*\*\*\*





## TEST REPORT

### Product Photos (Representative):

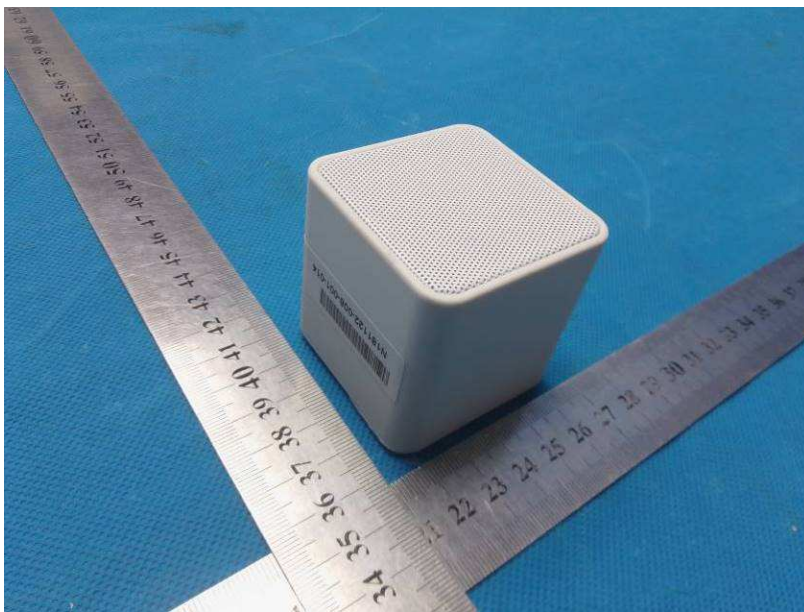

External view-2 for model Cube-Y450



External view-3 for model Cube-Y450

\*\*\*\*\*End of Page\*\*\*\*\*




## TEST REPORT

### Product Photos (Representative):



External view-1 for model Seed-Y450

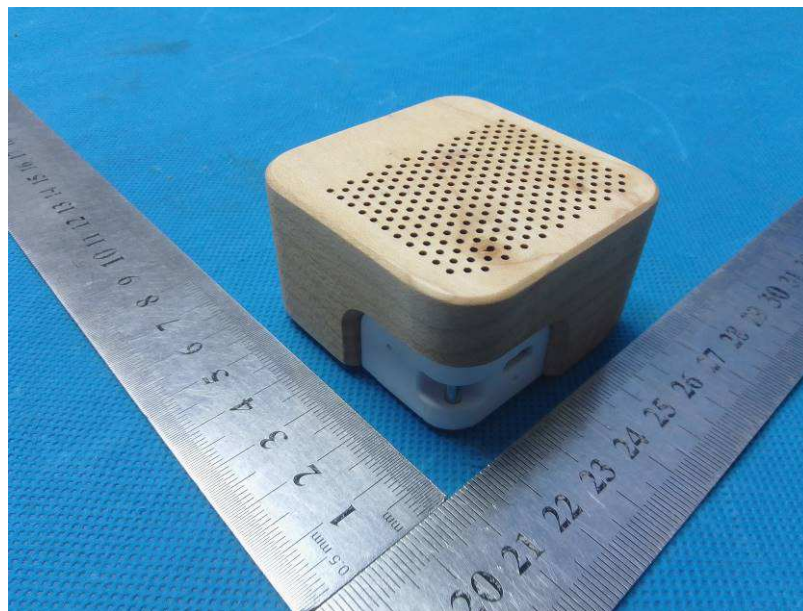

External view-2 for model Seed-Y450

\*\*\*\*\*End of Page\*\*\*\*\*





## TEST REPORT

### Product Photos (Representative):



External view-3 for model Seed-Y450



External view-1 for model Tab-Y450

\*\*\*\*\*End of Page\*\*\*\*\*



## TEST REPORT

### Product Photos (Representative):



External view-2 for model Tab-Y450



External view-3 for model Tab-Y450

\*\*\*\*\*End of Page\*\*\*\*\*





## TEST REPORT

### Product Photos (Representative):



External view-1 for model Ray-Y450




External view-2 for model Ray-Y450

\*\*\*\*\*End of Page\*\*\*\*\*



# TEST REPORT

## Product Photos (Representative):

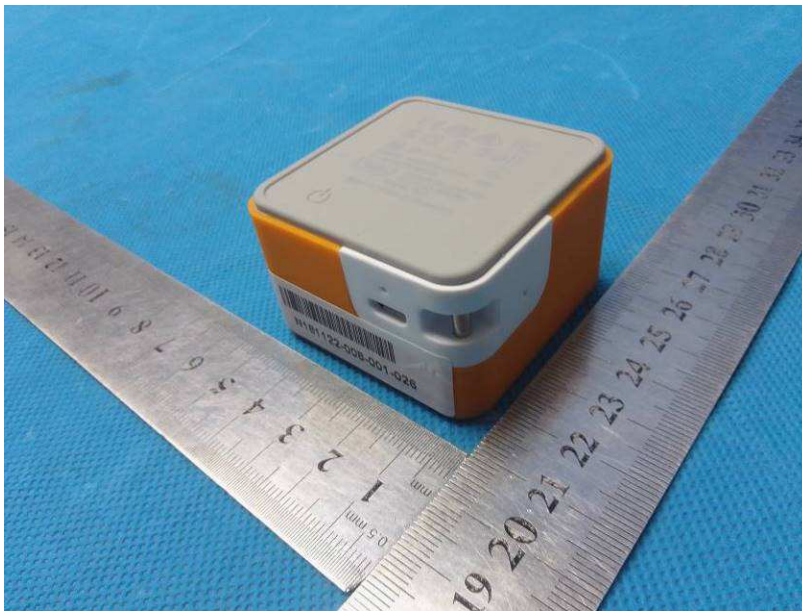

External view-3 for model Ray-Y450



Internal view-1


\*\*\*\*\*End of Page\*\*\*\*\*






## TEST REPORT

### Product Photos (Representative):

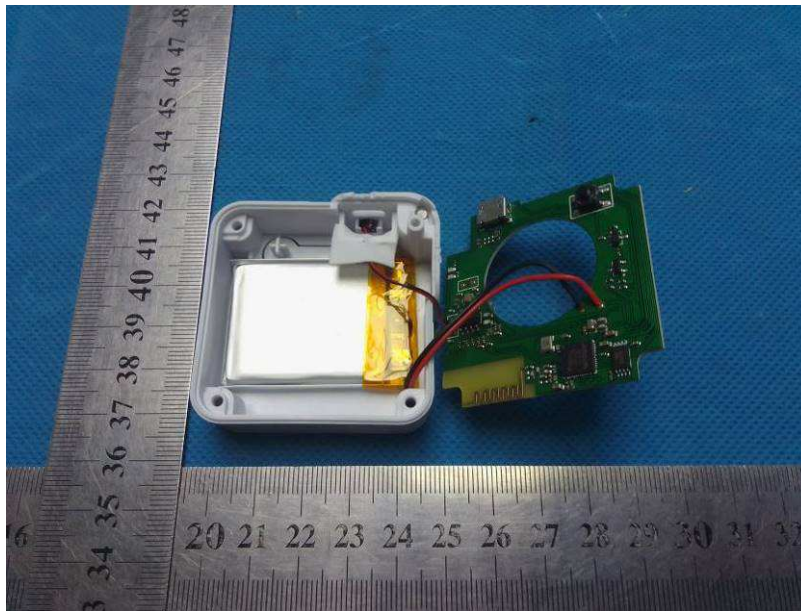

Internal view-2

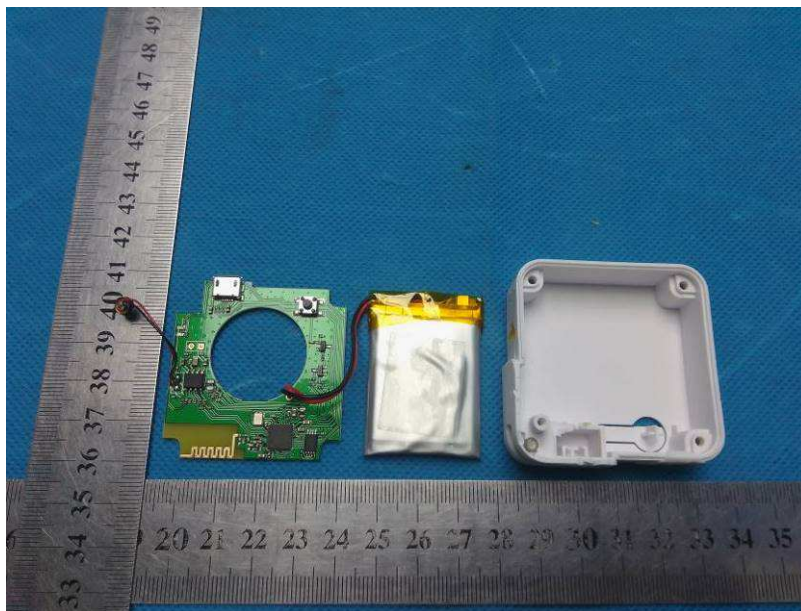


Internal view-3

\*\*\*\*\*End of Page\*\*\*\*\*




## TEST REPORT

### Product Photos (Representative):

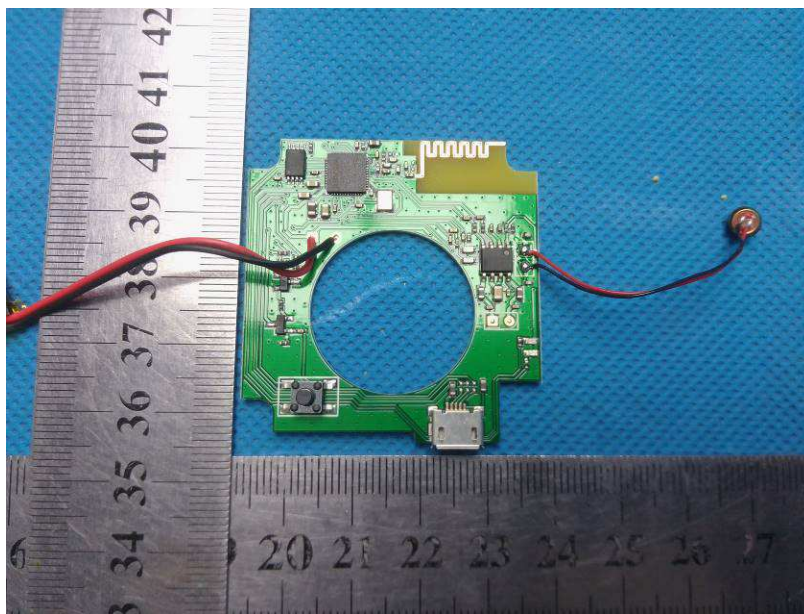

PCB view-1

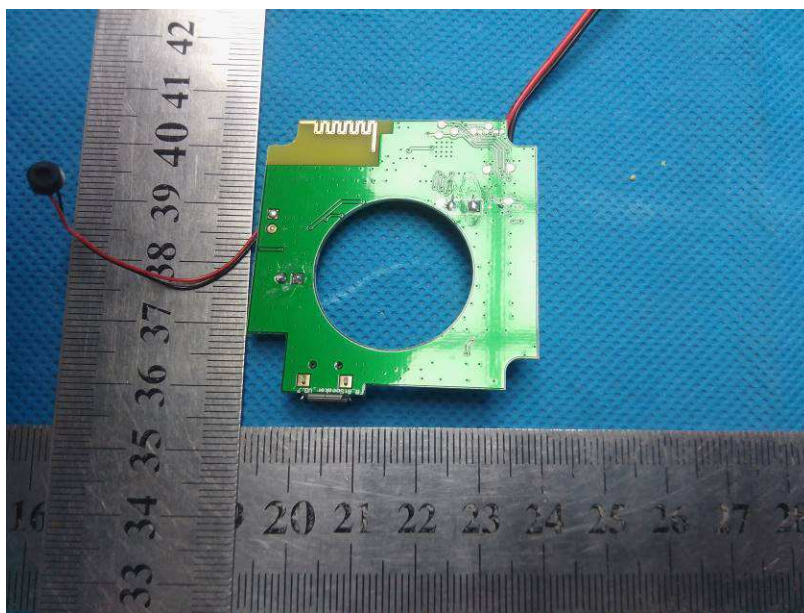

PCB view-2


\*\*\*\*\*End of Page\*\*\*\*\*





## TEST REPORT

### Product Photos (Representative):

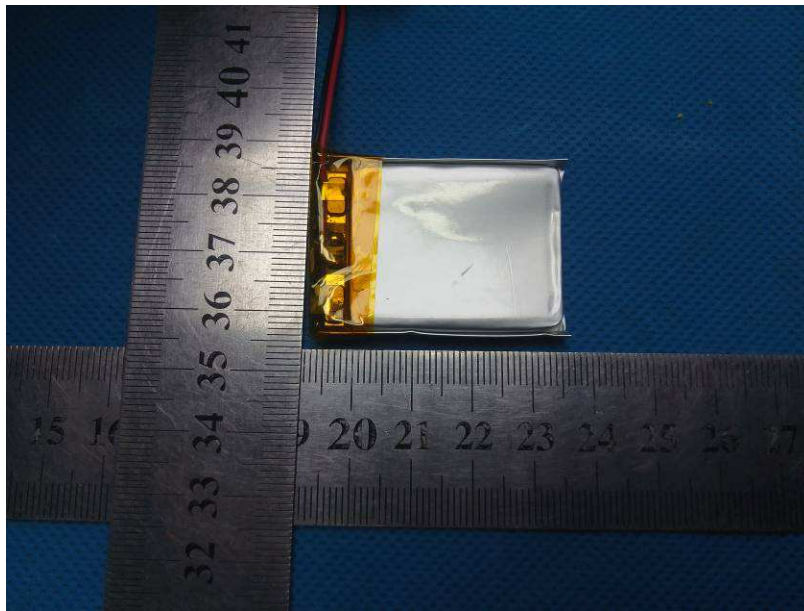

Battery view-1




Battery view-2

\*\*\*\*\*End of Page\*\*\*\*\*




### TEST REPORT

Product Photos (Representative):

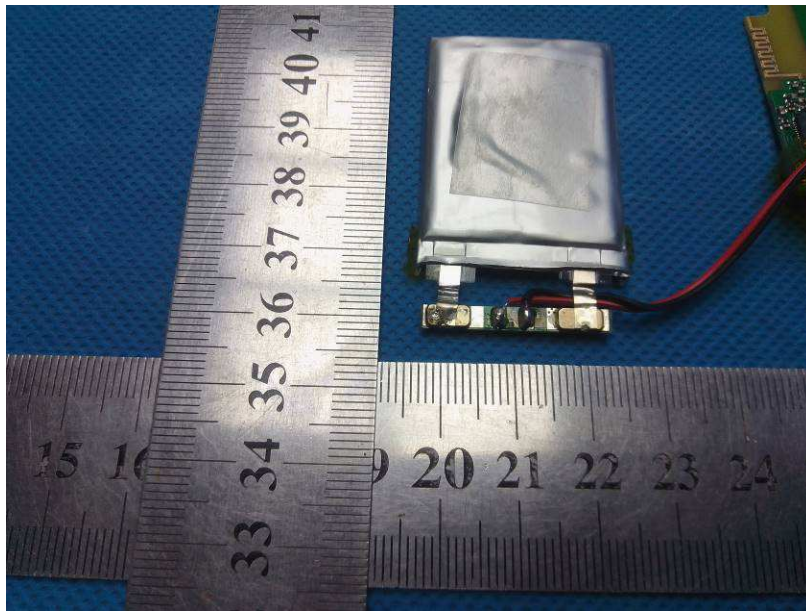

Battery view-3

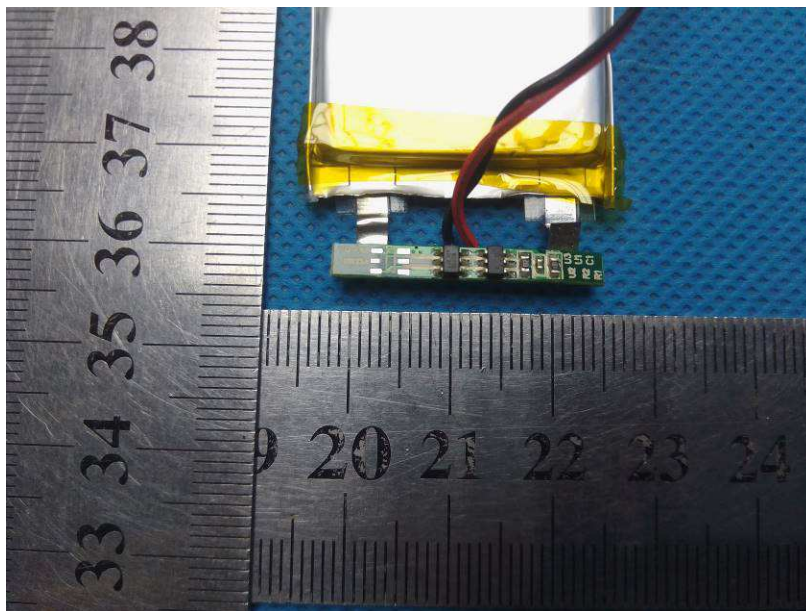

Battery view-4

\*\*\*\*\*End of Report\*\*\*\*\*